




Kuriyama of America, Inc.
 150 N MARTINGALE ROAD
 SCHAUMBURG, IL 60173-5335 USA
Phone: (847) 755-0360
Toll-Free FAX: (800) 800-0320
International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

Series 2600 85 Shore "A" Ether-Based Clear Food Grade Polyurethane Tubing

Clear Polyurethane Ether-based Food Grade Tubing for Transfer of Air, Fluids and Abrasive Slurries.

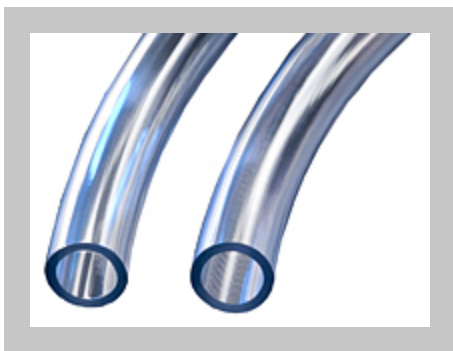

1

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Nominal Wall</u>	<u>Max. Working Pressure at 70°F (20°C)</u>	<u>Max. Working Pressure at 122°F (50°C)</u>	<u>Standard Length Coil/Box</u>	<u>Approx. Wt. per Pkg.</u>
<u>2600-0204X100</u>	0204	1/8 in 3.2 mm	1/4 in 6.4 mm	1/16 in 1.6 mm	100 psi	75 psi	100 ft	2.0 lb
<u>2600-0305X100</u>	0305	3/16 in 4.8 mm	5/16 in 7.9 mm	1/16 in 1.6 mm	75 psi	50 psi	100 ft	3 lb
<u>2600-0406X100</u>	0406	1/4 in 6.4 mm	3/8 in 9.5 mm	1/16 in 1.6 mm	60 psi	45 psi	100 ft	3.5 lb
<u>2600-0507X100</u>	0507	5/16 in 7.9 mm	7/16 in 11.1 mm	1/16 in 1.6 mm	50 psi	35 psi	100 ft	4.0 lb

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Nominal Wall</u>	<u>Max. Working Pressure at 70°F (20°C).</u>	<u>Max. Working Pressure at 122°F (50°C).</u>	<u>Standard Length Coil/Box</u>	<u>Approx. Wt. per Pkg.</u>
<u>2600-0608X100</u>	0608	3/8 in 9.5 mm	1/2 in 12.7 mm	1/16 in 1.6 mm	45 psi	30 psi	100 ft	5 lb
<u>2600-0812X100</u>	0812	1/2 in 12.7 mm	3/4 in 19.1 mm	1/8 in 3.2 mm	60 psi	45 psi	100 ft	13.0 lb