

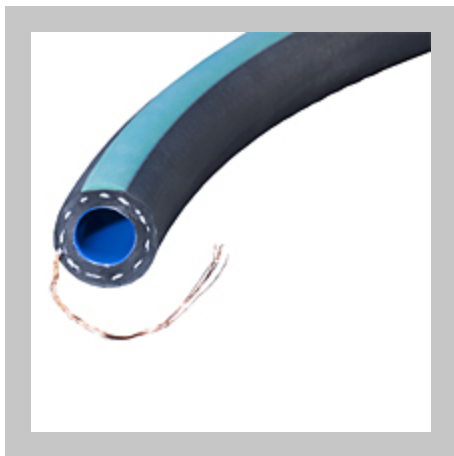
**Kuriyama of America, Inc.**

150 N MARTINGALE ROAD

SCHAUMBURG, IL 60173-5335 USA

Phone: (847) 755-0360**Toll-Free FAX:** (800) 800-0320**International FAX:** (847) 885-0996 **Email:** sales@kuriyama.com**Series A4143S with Static Wire Medium Pressure Paint Fluid Transfer Hose**

Lightweight polyethylene-lined rubber blend hose that is the ideal choice for handling paint and paint-related products in a variety of applications.

**1**

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Max. Working Pressure at 70°F (20°C)</u>	<u>Max. Working Pressure at 122°F (50°C)</u>	<u>Standard Lengths</u>	<u>Approx. Weight. Per Pkg.</u>
<u>A4143S-04X100</u>	04	1/4 in 6.5 mm	0.500 in 12.7 mm	175 psi	85 psi	100 ft	7 lb
<u>A4143S-04X500</u>	04	1/4 in 6.5 mm	0.500 in 12.7 mm	175 psi	85 psi	500 ft	36 lb
<u>A4143S-06X100</u>	06	3/8 in 9.5 mm	0.690 in 17.3 mm	175 psi	85 psi	100 ft	12 lb

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Max. Working Pressure at 70°F (20°C)</u>	<u>Max. Working Pressure at 122°F (50°C)</u>	<u>Standard Lengths</u>	<u>Approx. Weight. Per Pkg.</u>
<u>A4143S-06X500</u>	06	3/8 in 9.5 mm	0.690 in 17.3 mm	175 psi	85 psi	500 ft	60 lb
<u>A4143S-08X100</u>	08	1/2 in 12.7 mm	0.875 in 22.2 mm	175 psi	85 psi	100 ft	18 lb
<u>A4143S-08X500</u>	08	1/2 in 12.7 mm	0.875 in 22.2 mm	175 psi	85 psi	500 ft	93 lb
<u>A4143S-12X100</u>	12	3/4 in 19.0 mm	1.188 in 30.2 mm	150 psi	75 psi	100 ft	28 lb
<u>A4143S-12X300</u>	12	3/4 in 19.0 mm	1.188 in 30.2 mm	150 psi	75 psi	300 ft	85 lb
<u>A4143S-16X100</u>	16	1 in 25.4 mm	1.500 in 38.1 mm	125 psi	60 psi	100 ft	43 lb
<u>A4143S-16X200</u>	16	1 in 25.4 mm	1.500 in 38.1 mm	125 psi	60 psi	200 ft	86 lb