




Kuriyama of America, Inc.
 150 N MARTINGALE ROAD
 SCHAUMBURG, IL 60173-5335 USA
Phone: (847) 755-0360
Toll-Free FAX: (800) 800-0320
International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

Series K050 Clear PVC Tubing

Utility Grade Clear Food Grade Phthalate Free PVC Tubing for General use applications.

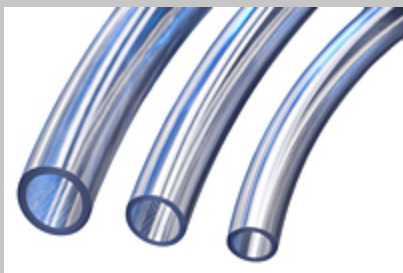

1

<u>Series Number</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Nominal Wall Thickness</u>	<u>Working Pressure at 70°F (20°C)</u>	<u>Standard Length Ctn/Coils</u>	<u>Approx. Wgt. Per Pkg.</u>
<u>K050-0204X100</u>	0204	1/8 in 3.2 mm	1/4 in 6.4 mm	1/16 in 1.6 mm	65 psi	100 ft	2.0 lb
<u>K050-0305X100</u>	0305	3/16 in 4.8 mm	5/16 in 7.9 mm	1/16 in 1.6 mm	55 psi	100 ft	2.7 lb
<u>K050-0406X100</u>	0406	1/4 in 6.4 mm	3/8 in 9.5 mm	1/16 in 1.6 mm	55 psi	100 ft	3.4 lb
<u>K050-0408X100</u>	0408	1/4 in 6.4 mm	1/2 in 12.7 mm	1/8 in 3.2 mm	60 psi	100 ft	8.0 lb
<u>K050-0507X100</u>	0507	5/16 in 7.9 mm	7/16 in 11.1 mm	1/16 in 1.6 mm	50 psi	100 ft	4.0 lb

<u>Series Number</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Nominal Wall Thickness</u>	<u>Working Pressure at 70°F (20°C)</u>	<u>Standard Length Ctn/Coils</u>	<u>Approx. Wgt. Per Pkg.</u>
<u>K050-0608X100</u>	0608	3/8 in 9.5 mm	1/2 in 12.7 mm	1/16 in 1.6 mm	45 psi	100 ft	4.7 lb
<u>K050-0609X100</u>	0609	3/8 in 9.5 mm	9/16 in 14.3 mm	3/32 in 2.4 mm	50 psi	100 ft	7.5 lb
<u>K050-0610X100</u>	0610	3/8 in 9.5 mm	5/8 in 15.9 mm	1/8 in 3.2 mm	55 psi	100 ft	10.7 lb
<u>K050-0810X100</u>	0810	1/2 in 12.7 mm	5/8 in 15.9 mm	1/16 in 1.6 mm	30 psi	100 ft	6.0 lb
<u>K050-0812X100</u>	0812	1/2 in 12.7 mm	3/4 in 19.1 mm	1/8 in 3.2 mm	45 psi	100 ft	13.4 lb
<u>K050-1013X100</u>	1013	5/8 in 15.9 mm	13/16 in 20.6 mm	3/32 in 2.4 mm	35 psi	100 ft	11.6 lb
<u>K050-1014X100</u>	1014	5/8 in 15.9 mm	7/8 in 22.2 mm	1/8 in 3.2 mm	40 psi	100 ft	16.1 lb
<u>K050-1216X100</u>	1216	3/4 in 19.1 mm	1 in 25.4 mm	1/8 in 3.2 mm	35 psi	100 ft	18.8 lb
<u>K050-1418X100</u>	1418	7/8 in 22.2 mm	1 1/8 in 28.6 mm	1/8 in 3.2 mm	30 psi	100 ft	21.4 lb
<u>K050-1620X100</u>	1620	1 in 25.4 mm	1 1/4 in 31.8 mm	1/8 in 3.2 mm	25 psi	100 ft	24.1 lb
<u>K050-2024X50</u>	2024	1 1/4 in 31.8 mm	1 1/2 in 38.1 mm	1/8 in 3.2 mm	20 psi	50 ft	14.8 lb
<u>K050-2430X50</u>	2430	1 1/2 in 38.1 mm	1 7/8 in 47.6 mm	3/16 in 4.8 mm	30 psi	50 ft	27.1 lb
<u>K050-2432X50</u>	2432	1 1/2 in 38.1 mm	2 in 50.8 mm	1/4 in 6.4 mm	35 psi	50 ft	37.5 lb
<u>K050-3240X50</u>	3240	2 in 50.8 mm	2 1/2 in 63.5 mm	1/4 in 6.4 mm	35 psi	50 ft	48.2 lb

