




Kuriyama of America, Inc.
 150 N MARTINGALE ROAD
 SCHAUMBURG, IL 60173-5335 USA
Phone: (847) 755-0360
Toll-Free FAX: (800) 800-0320
International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

CLEARBRAID® K3130 Series BF Heavy Wall PVC Food & Beverage Hose

A heavier walled crystal clear Phthalate Free yarn reinforced hose suitable for a wide variety of food and beverage applications.

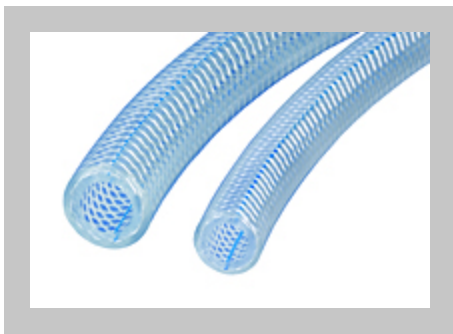

1

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Max. Working Pressure at 70°F (20°C).</u>	<u>Max. Working Pressure at 122°F (50°C).</u>	<u>Standard Lengths</u>	<u>Packaging</u>	<u>Approx. Wt. per Pkg.</u>
<u>K3130-02X100</u>	02	1/8 in 3.2 mm	0.328 in 8.3 mm	350 psi	200 psi	100 ft	Cut Length	4 lb
<u>K3130-02X300</u>	02	1/8 in 3.2 mm	0.328 in 8.3 mm	350 psi	200 psi	300 ft	Full Coil	12 lb
<u>K3130-03X100</u>	03	3/16 in 4.8 mm	0.406 in 10.3 mm	350 psi	200 psi	100 ft	Cut Length	6 lb
<u>K3130-03X300</u>	03	3/16 in 4.8 mm	0.406 in 10.3 mm	350 psi	200 psi	300 ft	Full Coil	17 lb

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Max. Working Pressure at 70°F (20°C)</u>	<u>Max. Working Pressure at 122°F (50°C)</u>	<u>Standard Lengths</u>	<u>Packaging</u>	<u>Approx. Wt. per Pkg.</u>
<u>K3130-04X100</u>	04	1/4 in 6.5 mm	0.500 in 12.7 mm	350 psi	200 psi	100 ft	Cut Length	8 lb
<u>K3130-04X300</u>	04	1/4 in 6.5 mm	0.500 in 12.7 mm	350 psi	200 psi	300 ft	Full Coil	24 lb
<u>K3130-05X100</u>	05	5/16 in 7.9 mm	0.563 in 14.3 mm	275 psi	160 psi	100 ft	Cut Length	9 lb
<u>K3130-05X300</u>	05	5/16 in 7.9 mm	0.563 in 14.3 mm	275 psi	160 psi	300 ft	Full Coil	28 lb
<u>K3130-06X100</u>	06	3/8 in 9.5 mm	0.625 in 15.9 mm	275 psi	145 psi	100 ft	Cut Length	11 lb
<u>K3130-06X300</u>	06	3/8 in 9.5 mm	0.625 in 15.9 mm	275 psi	145 psi	300 ft	Full Coil	32 lb
<u>K3130-08X100</u>	08	1/2 in 12.7 mm	0.813 in 20.7 mm	250 psi	130 psi	100 ft	Cut Length	17 lb
<u>K3130-08X300</u>	08	1/2 in 12.7 mm	0.813 in 20.7 mm	250 psi	130 psi	300 ft	Full Coil	52 lb
<u>K3130-10X100</u>	10	5/8 in 15.9 mm	1.000 in 25.4 mm	225 psi	125 psi	100 ft	Cut Length	26 lb
<u>K3130-10X200</u>	10	5/8 in 15.9 mm	1.000 in 25.4 mm	225 psi	125 psi	200 ft	Full Coil	52 lb
<u>K3130-12X100</u>	12	3/4 in 19.1 mm	1.125 in 28.6 mm	200 psi	120 psi	100 ft	Cut Length	30 lb
<u>K3130-12X200</u>	12	3/4 in 19.1 mm	1.125 in 28.6 mm	200 psi	120 psi	200 ft	Full Coil	60 lb
<u>K3130-16X100</u>	16	1 in 25.4 mm	1.375 in 34.9 mm	150 psi	85 psi	100 ft	Cut Length	38 lb

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Max. Working Pressure at 70°F (20°C)</u>	<u>Max. Working Pressure at 122°F (50°C)</u>	<u>Standard Lengths</u>	<u>Packaging</u>	<u>Approx. Wt. per Pkg.</u>
<u>K3130-16X200</u>	16	1 in 25.4 mm	1.375 in 34.9 mm	150 psi	85 psi	200 ft	Full Coil	76 lb
<u>K3130-20X50</u>	20	1 1/4 in 31.8 mm	1.750 in 44.5 mm	125 psi	75 psi	50 ft	Cut Length	32 lb
<u>K3130-20X100</u>	20	1 1/4 in 31.8 mm	1.750 in 44.5 mm	125 psi	75 psi	100 ft	Full Coil	64 lb
<u>K3130-24X50</u>	24	1 1/2 in 38.1 mm	2.000 in 50.8 mm	100 psi	65 psi	50 ft	Cut Length	38 lb
<u>K3130-24X100</u>	24	1 1/2 in 38.1 mm	2.000 in 50.8 mm	100 psi	65 psi	100 ft	Full Coil	75 lb
<u>K3130-32X50</u>	32	2 in 50.8 mm	2.500 in 63.5 mm	75 psi	55 psi	50 ft	Cut Length	48 lb
<u>K3130-32X100</u>	32	2 in 50.8 mm	2.500 in 63.5 mm	75 psi	55 psi	100 ft	Full Coil	96 lb