




Kuriyama of America, Inc.
 150 N MARTINGALE ROAD
 SCHAUMBURG, IL 60173-5335 USA
Phone: (847) 755-0360
Toll-Free FAX: (800) 800-0320
International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

CLEARBRAID® K3150 Series Reinforced PVC Beverage Hose

A lightweight standard wall crystal clear Phthalate Free yarn reinforced hose suitable for a wide variety of food and beverage applications.

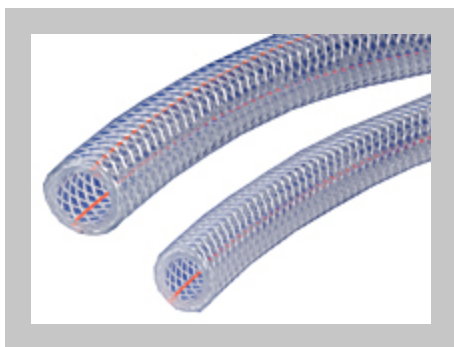

1

<u>Part Number</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Max. Working Pressure at 70°F (20°C)</u>	<u>Max. Working Pressure at 122°F (50°C)</u>	<u>Standard Lengths</u>	<u>Approx. Wt. per Pkg.</u>
<u>K3150-03X100</u>	3/16 in 4.8 mm	0.375 in 9.5 mm	250 psi	150 psi	100 ft	4 lb
<u>K3150-03X300</u>	3/16 in 4.8 mm	0.375 in 9.5 mm	250 psi	150 psi	300 ft	13 lb
<u>K3150-04X100</u>	1/4 in 6.5 mm	0.438 in 11.1 mm	250 psi	150 psi	100 ft	6 lb
<u>K3150-04X300</u>	1/4 in 6.5 mm	0.438 in 11.1 mm	250 psi	150 psi	300 ft	17 lb

<u>Part Number</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Max. Working Pressure at 70°F (20°C)</u>	<u>Max. Working Pressure at 122°F (50°C)</u>	<u>Standard Lengths</u>	<u>Approx. Wt. per Pkg.</u>
<u>K3150-05X100</u>	5/16 in 7.9 mm	0.531 in 13.5 mm	250 psi	135 psi	100 ft	8 lb
<u>K3150-05X300</u>	5/16 in 7.9 mm	0.531 in 13.5 mm	250 psi	135 psi	300 ft	24 lb
<u>K3150-06X100</u>	3/8 in 9.5 mm	0.594 in 15.1 mm	225 psi	125 psi	100 ft	9 lb
<u>K3150-06X300</u>	3/8 in 9.5 mm	0.594 in 15.1 mm	225 psi	125 psi	300 ft	27 lb
<u>K3150-08X100</u>	1/2 in 12.7 mm	0.750 in 19.1 mm	200 psi	100 psi	100 ft	13 lb
<u>K3150-08X300</u>	1/2 in 12.7 mm	0.750 in 19.1 mm	200 psi	100 psi	300 ft	40 lb
<u>K3150-10X100</u>	5/8 in 15.9 mm	0.891 in 22.6 mm	200 psi	100 psi	100 ft	18 lb
<u>K3150-10X200</u>	5/8 in 15.9 mm	0.891 in 22.6 mm	200 psi	100 psi	200 ft	35 lb
<u>K3150-12X100</u>	3/4 in 19.1 mm	1.031 in 26.2 mm	150 psi	85 psi	100 ft	22 lb
<u>K3150-12X200</u>	3/4 in 19.1 mm	1.031 in 26.2 mm	150 psi	85 psi	200 ft	43 lb
<u>K3150-16X100</u>	1 in 25.4 mm	1.300 in 33.0 mm	125 psi	75 psi	100 ft	30 lb
<u>K3150-16X200</u>	1 in 25.4 mm	1.300 in 33.0 mm	125 psi	75 psi	200 ft	59 lb
<u>K3150-20X50</u>	1 1/4 in 31.8 mm	1.620 in 41.1 mm	100 psi	55 psi	50 ft	23 lb
<u>K3150-20X100</u>	1 1/4 in 31.8 mm	1.620 in 41.1 mm	100 psi	55 psi	100 ft	45 lb

<u>Part Number</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Max. Working Pressure at 70°F (20°C)</u>	<u>Max. Working Pressure at 122°F (50°C)</u>	<u>Standard Lengths</u>	<u>Approx. Wt. per Pkg.</u>
<u>K3150-24X50</u>	1 1/2 in 38.1 mm	1.938 in 49.2 mm	100 psi	50 psi	50 ft	32 lb
<u>K3150-24X100</u>	1 1/2 in 38.1 mm	1.938 in 49.2 mm	100 psi	50 psi	100 ft	64 lb
<u>K3150-32X50</u>	2 in 50.8 mm	2.490 in 63.2 mm	75 psi	35 psi	50 ft	47 lb
<u>K3150-32X100</u>	2 in 50.8 mm	2.490 in 63.2 mm	75 psi	35 psi	100 ft	94 lb
<u>K3150-MM04x100</u>	0.157 in 4.0 mm	0.354 in 9.0 mm	250 psi	150 psi	100 ft	4 lb
<u>K3150-MM06x100</u>	0.236 in 6.0 mm	0.433 in 11.0 mm	250 psi	150 psi	100 ft	6 lb
<u>K3150-MM08x100</u>	0.315 in 8.0 mm	0.531 in 13.5 mm	250 psi	135 psi	100 ft	8 lb
<u>K3150-MM10x100</u>	0.394 in 10.0 mm	0.630 in 16.0 mm	225 psi	125 psi	100 ft	10 lb
<u>K3150-MM12x100</u>	0.472 in 12.0 mm	0.709 in 18.0 mm	200 psi	100 psi	100 ft	12 lb
<u>K3150-MM19x100</u>	0.748 in 19.0 mm	1.024 in 26.0 mm	150 psi	85 psi	100 ft	21 lb