




Kuriyama of America, Inc.
 150 N MARTINGALE ROAD
 SCHAUMBURG, IL 60173-5335 USA
Phone: (847) 755-0360
Toll-Free FAX: (800) 800-0320
International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

POLYSPRING® Series K7160 Standard Wall PVC Food & Beverage Vacuum/Transfer Hose

Standard wall food and beverage grade vacuum/transfer hose with rated working pressures.

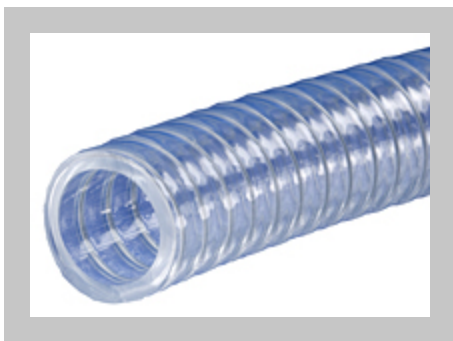

1

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Maximum Working Pressure at 70°F (20°C)</u>	<u>Maximum Working Pressure at 122°F (50°C)</u>	<u>Standard Length Coils</u>	<u>Approx. Wt. per Pkg.</u>	<u>Min. bend Radius at 70°F</u>
<u>K7160-04X50</u>	04	1/4 in 6.4 mm	0.460 in 11.7 mm	150 psi	70 psi	50 ft	4 lb	1 in
<u>K7160-04X100</u>	04	1/4 in 6.4 mm	0.460 in 11.7 mm	150 psi	70 psi	100 ft	7 lb	1 in
<u>K7160-06X50</u>	06	3/8 in 9.5 mm	0.600 in 15.2 mm	100 psi	70 psi	50 ft	6 lb	1 1/2 in
<u>K7160-06X100</u>	06	3/8 in 9.5 mm	0.600 in 15.2 mm	100 psi	70 psi	100 ft	11 lb	1 1/2 in

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Maximum Working Pressure at 70°F (20°C)</u>	<u>Maximum Working Pressure at 122°F (50°C)</u>	<u>Standard Length Coils</u>	<u>Approx. Wt. per Pkg.</u>	<u>Min. bend Radius at 70°F</u>
<u>K7160-08X50</u>	08	1/2 in 12.7 mm	0.750 in 19.1 mm	100 psi	70 psi	50 ft	8 lb	2 in
<u>K7160-08X100</u>	08	1/2 in 12.7 mm	0.750 in 19.1 mm	100 psi	70 psi	100 ft	15 lb	2 in
<u>K7160-10X50</u>	10	5/8 in 15.9 mm	0.891 in 22.6 mm	100 psi	50 psi	50 ft	10 lb	2 1/2 in
<u>K7160-10X100</u>	10	5/8 in 15.9 mm	0.891 in 22.6 mm	100 psi	50 psi	100 ft	19 lb	2 1/2 in
<u>K7160-12X50</u>	12	3/4 in 19.1 mm	1.031 in 26.2 mm	70 psi	50 psi	50 ft	12 lb	3 in
<u>K7160-12X100</u>	12	3/4 in 19.1 mm	1.031 in 26.2 mm	70 psi	50 psi	100 ft	24 lb	3 in
<u>K7160-16X50</u>	16	1 in 25.4 mm	1.297 in 32.9 mm	70 psi	35 psi	50 ft	17 lb	4 in
<u>K7160-16X100</u>	16	1 in 25.4 mm	1.297 in 32.9 mm	70 psi	35 psi	100 ft	33 lb	4 in
<u>K7160-20X50</u>	20	1 1/4 in 31.8 mm	1.609 in 40.9 mm	70 psi	35 psi	50 ft	25 lb	5 in
<u>K7160-24X50</u>	24	1 1/2 in 38.1 mm	1.860 in 47.2 mm	50 psi	30 psi	50 ft	29 lb	6 in
<u>K7160-32X50</u>	32	2 in 50.8 mm	2.391 in 60.7 mm	50 psi	30 psi	50 ft	42 lb	8 in
<u>K7160-36X50</u>	36	2 1/4 in 57.2 mm	2.750 in 69.9 mm	50 psi	30 psi	50 ft	58 lb	9 in
<u>K7160-40X50</u>	40	2 1/2 in 63.5 mm	3.000 in 76.2 mm	50 psi	30 psi	50 ft	69 lb	10 in

<u>Series No.</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Maximum Working Pressure at 70°F (20°C)</u>	<u>Maximum Working Pressure at 122°F (50°C)</u>	<u>Standard Length Coils</u>	<u>Approx. Wt. per Pkg.</u>	<u>Min. bend Radius at 70°F</u>
<u>K7160-48X25</u>	48	3 in 76.2 mm	3.500 in 88.9 mm	50 psi	30 psi	25 ft	41 lb	12 in
<u>K7160-48X50</u>	48	3 in 76.2 mm	3.500 in 88.9 mm	50 psi	30 psi	50 ft	81 lb	12 in